6.0 inch Four-Digit
RF Wireless controlled Universal
Countdown, Count Up Timer and
Time of Day Clock <u>DC-60UTW</u>
(outdoor)





#### **Features**

- Counts up or down to 99Hours
- Displays hundredths of a second
- Set Hours, Minutes and Seconds
- 1 Year Warranty
- RF Wireless controls (150' range WRC-8T)

- Visible up to 300 feet
- Large 6.0 Inch Super Bright LED's
- Shift Digit Technology
- Made in the USA
- Piezo beep for E.O.P. and on switch press

#### **Options**

- 6-Digit for Displaying Hours, Minutes, Seconds
- Wired remote control
- Nema 4X IP66, IK08 rated enclosure
- Outdoor

- 120 Vac 9 ft. power cord
- Static Display, Timer, Temperature available
- High output end of period buzzer

## **Specifications**

• Input 8 Function Membrane Switch Pushbutton, 2.4 Ghz RF wireless 1mW, Start-Stop,

Reset to the last value, Reset to Zero, Set Hours, Set Minutes, Set Seconds, Time

of day clock/Timer, Count Up/Countdown

Display
 6.0 Inch, Four digit, Seven Segment, High Intensity, Red LED display

• Case Extruded Aluminum; 16.25"W x 6.75"H x 3.06"D

Weight 15.0 Pounds

Power Source
 20 Watts; 100-240VAC 50/60Hz, 2 wire with ground pigtails in junction box

Operating Temp 0° to 49° Celsius (32° to 120° Fahrenheit)

Case Finish Tough, Finger Print Resistant, Black Powder Coating


### **DC-60UTW** Description

The DC-Digital <u>DC-60UTW</u> is designed to be used in any application where any 4 digit RF-Wireless multifunction count up, countdown timer and time of day clock is needed to be seen. It can count up to 99 hours from hundredths of a second and or count down from any preset value (even seconds) from 99 hours to hundredths of a second and also keep the time of day (default is 12 Hour). This unique design can be used in either indoor or outdoor applications. This equipment is proudly made in the USA. This display is factory serviceable.

Specification Sheet Page | 1

# **DC-60UTW** Mounting and Dimensions

There are (2) adjustable keyhole mounting tabs for easy attachment to a wall.

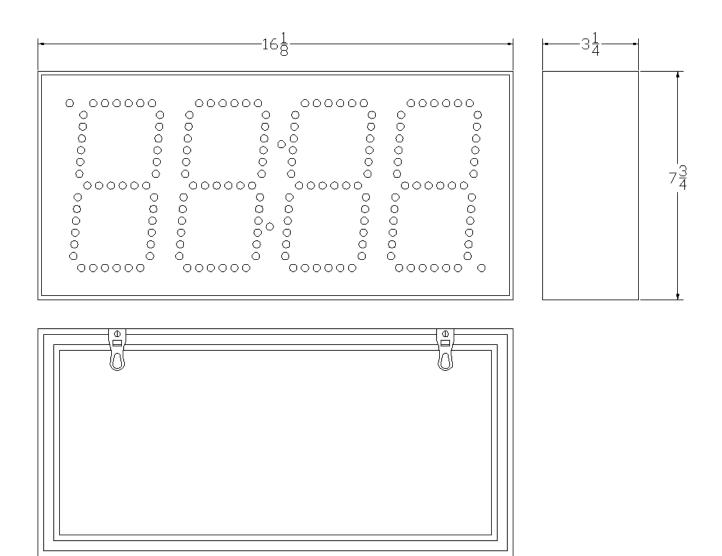

**Specification Sheet**