8.0 inch Four-Digit Digital Red LED Time of Day

Clock (indoor)

DC-80S-IN





Features

- Time of Day 12-24 Hour Format
- All aluminum enclosure (Black powder coated)
- Surface mount
- 1 year Warranty
- Hours and minutes set switches mounted on the top of the enclosure.
- + or 2 minutes per year accuracy (factory calibrated)
- Large 8.0 Inch Super Bright LED's
- 6 ft. 3 prong power cord
- Visible up to 400Ft.
- Factory serviceable modular design

Options

- RF Wireless remote controls
- NEMA 4X Polycarbonate case
- Double face hall mount
- Yellow or Green LEDs

- Network or GPS Atomic Updates
- Timer, Counter, Static number display
- Computer controlled
- RF Wireless System

Specifications

Input
 (2) Momentary sealed pushbutton switches; Set Hours, Set Minutes, Set Format

• **Display** 8.0 Inch, Four digit, Seven Segment, Red LED display

• Case Extruded Aluminum; 11 inches high x 25 inches wide x 3.25 inches deep.

Weight 20.0 Pounds

Power Source
 20 Watts; 100 – 240VAC 50/60 Hz, 3 prong 6 ft. power cord

(9 volt rechargeable battery backup included)

• Operating Temp 0° to 49° Celsius (32° to 120° Fahrenheit)

Case Finish
 Tough, Finger Print Resistant, Black Powder Coating

DC-80S-IN Description

The DC-Digital <u>DC-80S-IN</u> is designed to be used where a Large time of day clock is needed. The flexibility of this unique design gives it a broad range of applications in schools, industry, governmental and churches. It can be used in either existing buildings or new construction. Long viewing distances are accomplished with its large red LED display. The all aluminum, black extra tough powder coated enclosure gives it a professional look that will hold up in many harsh environments. This equipment is proudly made in the USA. This display is factory serviceable.

937-746-9750, Fax 937-746-9704


325 Industry Drive, Carlisle, OH


Copyright IES, LTD. 2009

Specification Sheet Page | 1

DC-80S-IN Mounting and dimensions:

There are (2) adjustable keyhole mounting tabs for easy attachment to a wall.

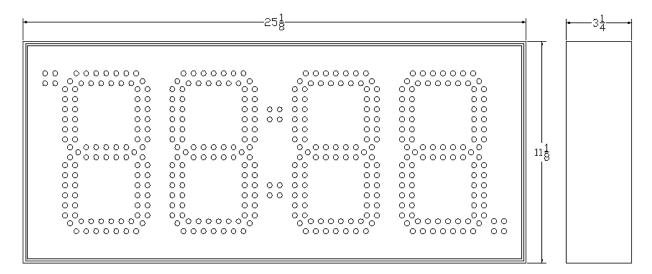

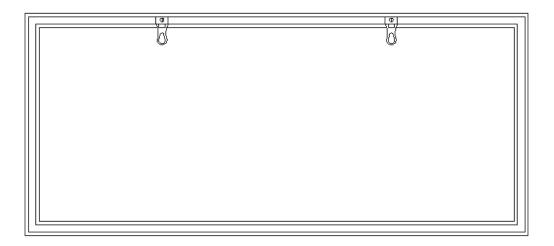

Specification Sheet Page | 2