# 6.0 inch Four-Digit LED

Countdown timer with top mounted controls

DC-60T-DN-IN





#### **Features**

- Extruded aluminum enclosure
- Counts down from 99 hours to hundredths of a second
- Displays up to 100ths of a sec
- 1 year Warranty
- Time of day display
- Top mounted tactile push-button controls

- Visible up to 300Ft
- Large 6.0 Inch Super Bright LED's
- Made in the USA
- Shift Digit Technology
- Factory Serviceable

### **Options**

- RF Wireless Controls
- BCD Rotary Set Switches
- Input redundancy, terminal block and switches
- Minutes and Seconds

- Nema 4X IP66, IK08 rated enclosure
- 24Vdc power
- Hours and minutes timing interval
- 100s of options call 800-977-6872

## **Specifications**

• Controls Tactile momentary pushbuttons mounted on the top of the enclosure

(1) Start-Stop (pause), (1) Reset to the set value, (1) Reset to zero, (1) Set Hours,

(1) Set Minutes

Display Four digit bar; high intensity; seven segment; red LED display
Case Extruded aluminum enclosure, 23-1/8"W x 7-1/2"L x 3-1/8"D

• Weight 8.0 Pounds

• Power Source 4 Watts; 90 – 240VAC 50/60 Hz, 6ft 3-prong power cord

Operating Temp 0° to 49° Celsius (32° to 120° Fahrenheit)

Case Finish Black Textured Powder Coating


### DC-60T-DN-IN


The DC-Digital DC-60T-DN-IN is designed to be used where a highly visible countdown timer is needed. The DC-60T-DN-IN utilizes the **shift digit technology** that allows the user to see hours as well as hundredths of a second. The flexibility of this unique design gives it a broad range of applications in industry, government, schools and churches. It can be used in either existing buildings or new construction. Long viewing distances are accomplished with its large red LED display. The all aluminum, black extra tough powder coated enclosure gives it a professional look that will hold up in many harsh environments.

Specification Sheet Page | 1

### **DC-60T-DN-IN** Mounting and Dimensions

There are (2) teardrop mountings for easy attachment to a couple of screws secured to a wall. Also supplied are 4 adhesive backed rubber feet that can be adhered to the enclosure bottom for table or Mount on a desk top.

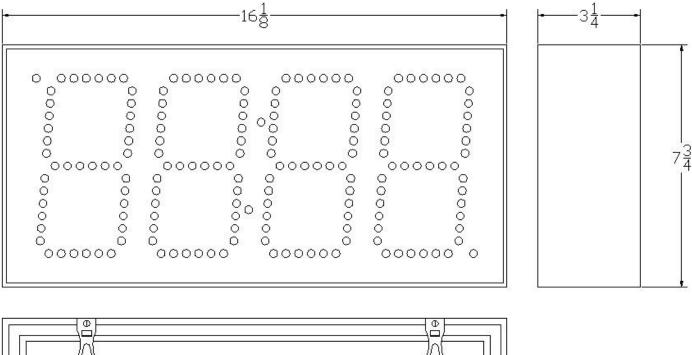

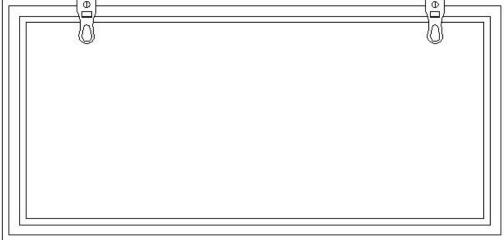

**Specification Sheet** 

Copyright IES, LTD. 2009