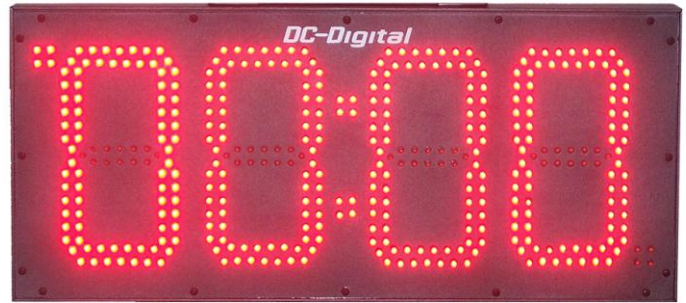# 8.0 inch Four-Digit LED
Countdown timer with rotary set switches
DC-80T-DN-BCD

DC-Digital ™

Features

- Counts down from 99 mins to hundredths of a second
- Heavy duty all aluminum enclosure
- Displays up to 100ths of a sec
- 1 year Warranty
- Terminal block connections for controls from PLC's, sensors, relays, switches etc.
- Visible up to 400Ft
- Large 8.0 Inch Super Bright LED's
- Made in the USA
- Shift Digit Technology
- Factory Serviceable
- Set and Forget Technology

Options

- Momentary push button switches
- Wired remote control
- Input redundancy, terminal block and switches
- 1-Switch for Start-Stop-Reset
- Nema 4X IP66, IK08 rated enclosure
- 24Vdc power
- Hours and minutes timing interval
- 100s of options call 800-977-6872

Specifications

- **Input**   (1) Start-Stop (pause), (1) Reset to the set value, 10ms response Momentary contact closure, TTL, NPN or connection to 0V
- **Display**   Four digit bar; high intensity; seven segment; red LED display
- **Case**   Extruded aluminum enclosure, 25 inches wide x 11 inches tall x 3-1/4 inches deep
- **Weight**   15.0 Pounds
- **Power Source**   20 Watts; 90 – 240VAC 50/60 Hz, 6ft 3-prong power cord
- **Operating Temp** 0° to 49° Celsius (32° to 120° Fahrenheit)
- **Case Finish**   Finger Print Resistant , Tough, Black Textured Powder Coating

DC-80T-DN-BCD

The DC-Digital DC-80T-DN-BCD is designed to be used where a highly visible countdown timer is needed. The flexibility of this unique design gives it a broad range of applications in industry, government, schools and churches. The Internal terminal blocks allow for hardwired controls from PLC's, switches, relays and or sensors. It can be used in either existing buildings or new construction. Long viewing distances are accomplished with its large red LED display. The all aluminum, black extra tough powder coated enclosure gives it a professional look that will hold up in many harsh environments.

DC-80T-DN-BCD Mounting and Dimensions

There are (2) adjustable keyhole mounting tabs for easy attachment to a wall.