


# 8.0 inch Four-Digit LED Countdown timer with top mounted controls

**DC-80T-DN-IN**

**DC-Digital**  
tm

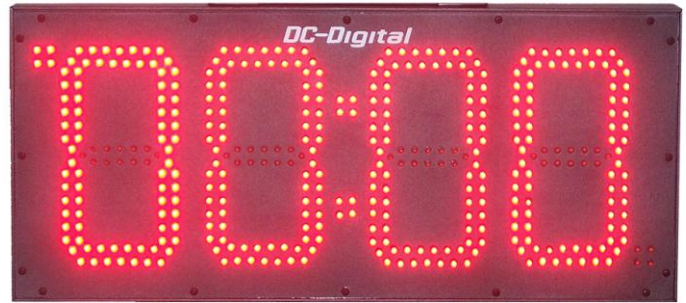

## Features

- Counts down from 99 min to hundredths of a second
- All Extruded aluminum enclosure
- Displays down to 100ths of a second
- 1-Year warranty
- Top mounted tactile pushbutton controls
- Factory calibrated quartz accuracy
- Large 8 Inch Super bright LED's
- Factory serviceable modular design
- Visible up to 400Ft.

## Options

- BCD Rotary Set Switches
- Wired or wireless remote control
- Green, Amber LED available
- Static Display, Timer, Temperature available
- Hours and Minutes timing interval available
- EOP (end of period buzzer)

## Specifications

- **Input** Tactile momentary pushbuttons mounted on the top of the enclosure (1) Start-Stop (pause), (1) Reset to the set value, (1) Reset to zero, (1) Set Hours, (1) Set Minutes
- **Display** Four digit bar; high intensity; seven segment; red LED display
- **Case** Extruded aluminum enclosure, 25 inches wide x 11 inches tall x 3-1/4 inches deep
- **Weight** 15.0 Pounds
- **Power Source** 20 Watts; 90 – 240VAC 50/60 Hz, 6ft 3-prong power cord
- **Operating Temp** 0° to 49° Celsius (32° to 120° Fahrenheit)
- **Case Finish** Finger Print Resistant , Tough, Black Textured Powder Coating

## DC-80T-DN-IN

The DC-Digital [DC-80T-DN-IN](#) is designed to be used where a highly visible countdown timer is needed. The [DC-80T-DN-IN](#) utilizes the **shift digit technology** that allows the user to see minutes as well as hundredths of a second. The flexibility of this unique design gives it a broad range of applications in industry, government, schools and churches. It can be used in either existing buildings or new construction. Long viewing distances are accomplished with its large red LED display. The all aluminum, black extra tough powder coated enclosure gives it a professional look that will hold up in many harsh environments.

## [DC-80T-DN-IN](#) Mounting and Dimensions

There are (2) adjustable keyhole mounting tabs for easy attachment to a wall.

