IP-54, NEMA 12 & 13 Heavy Duty Remote Timer Switches and Cabling

SW-2-HD-RED-BLK-NEMA





Features

- Everything included for easy installation
- (2) 40 mm, mushroom head, pushbuttons
- Momentary N.O.
- 25 Feet long, 22 AWG wire leads with terminations

Options

- Multiple N.O. and N.C. contacts snap on
- 60 mm Mushroom head
- Key Switch
- Custom wire lead lengths

- UL Listed, CSA Certified, TUV Approved, and CE
- Wide switching range from 5 mA to 10 A
- 14Ga. NEMA 12,13 and IP54 watertight enclosure
- Made in the USA
- Red, Yellow, Green, Blue, Black and White buttons
- Latching (maintained) contacts
- IP20 (finger-safe) contacts
- Illuminated pushbuttons

Specifications

Function (2) NEMA, IP-54 Push-Button Switches, Enclosure and 25 Feet of Cabling
Operation Momentary Normally Open (Separate contacts but use same common)

• Mechanical Life 5,000,000 (900 operations per hour)

• Weight 1.0 Pound

• Operating Temp 0° to 49° Celsius (32° to 120° Fahrenheit)

• Operating Force 8 Nm (816 grams)

Dimensions
Protection
3.11 inches (7.9 cm) x 1.575 inches (4 cm) x 1.575 inches (4 cm)
Protection
IP65; NEMA Type 1, 2, 3, 3R, 3S, 4, 4X, 5, 12, 13 (From front of Panel)

• Standards Conforming to EN60947-1, EN60947-5-1, VDE0660-200, UL508, CSA C22-2 No.14, IEC60529,

NEMA ICS6-110


Approvals CSA, UL, TÜV

SW-2-HD-RED-BLK-NEMA Description:

The DC-Digital SW-2-HD-RED-BLK-NEMA is designed to be used where rugged pushbutton switches can provide remote operation of compatible DC-Digital displays. The large mushroom heads accommodate palm operation or operation with gloved fingers. The IP-54, NEMA ratings and heavy duty construction suit a large variety of applications, such as, industrial controls, production fixtures, information exhibits, museums, arcade games, kiosks, automation, remote control and operator interfaces. It's proudly assembled in the USA by employees who value high quality and customer satisfaction.

Specification Sheet Page | 1

SW-2-HD-RED-BLK-NEMA - Dimensions:

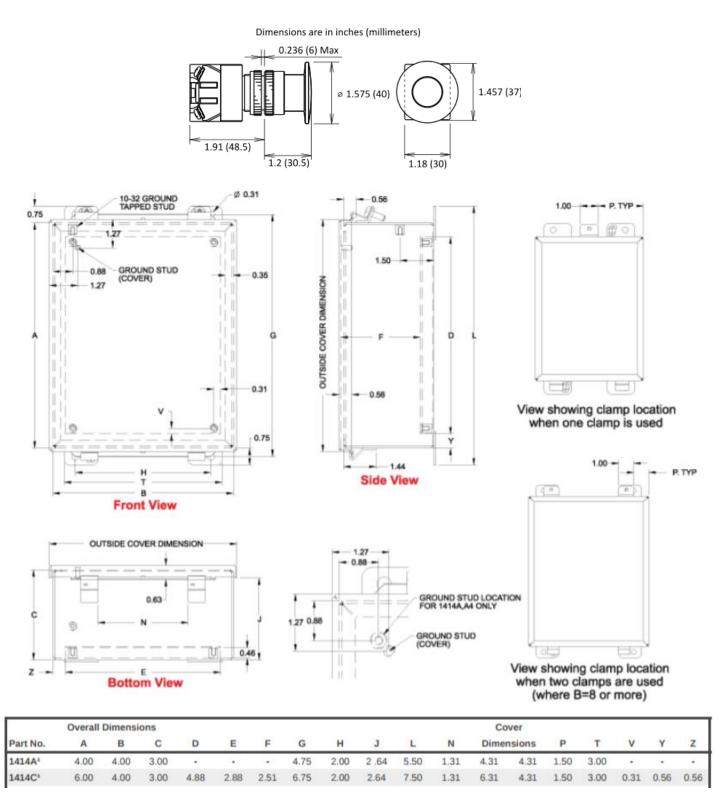

(1414C Enclosure)

937-746-9750, Fax 937-746-9704 325 Industry Drive, Carlisle, OH

Copyright IES, LTD. 2009

Specification Sheet Page | 2