# 15.0 inch Six-Digit Network Time of Day Clock <u>DC-156N</u>





#### **Features**

- Network DHCP or Static IP
- Time Zone Selectable
- Surface mount
- Extruded aluminum enclosure
- Made in the USA

- 12-24 Hour Atomic Time
- Large 15 Inch Super Bright Bar LED's
- Outdoor rated
- Visible up to 750Ft.
- Factory serviceable modular design
- 1-Year warranty

#### **Options**

- POE injector
- WIFI available

• Static Display, Timer, Temperature available

## **Specifications**

• **Display** 15 Inch, six digit, seven segment, red LED display

Case
IP-66 water proof all aluminum enclosure, 72"W x 19"H x 3-1/4"D

Weight 35.0 Pounds

Power Source 120-250 VAC, 50-60 Hz,@ 3 amps with ground (junction box with pigtails)

Operating Temp 0° to 49° Celsius (32° to 120° Fahrenheit)

Case Finish Black Powder Coating

Cabling Ethernet


## DC-156N Description

The DC-Digital <u>DC-156N</u> time of day clock is designed to be used in any application where any 6 digit time of day clock is needed to be seen. It automatically queries NTP once every 10 seconds and on power up. It can be set up for 12 or 24 hour time format (default is 12 Hour). It can be set up for static IP to receive the NTP from your server (default is DHCP). This unique design can be used in either existing buildings or new construction. The <u>DC-156N</u> time of day clock comes with an aluminum case with mounting brackets and (2) outdoor rated junction boxes for easy connections to power and data. This equipment is proudly made in the USA. This display is factory serviceable.

Specification Sheet Page | 1

## **DC-156N** Mounting and Dimensions

There are (2) aluminum .125 inch x 1.5 inch x .75 inch C channel mounting rails that can be used as mounting brackets and secured to a wall or they can be removed and the (4)  $5/16 \times 1$  inch bolts can be used.

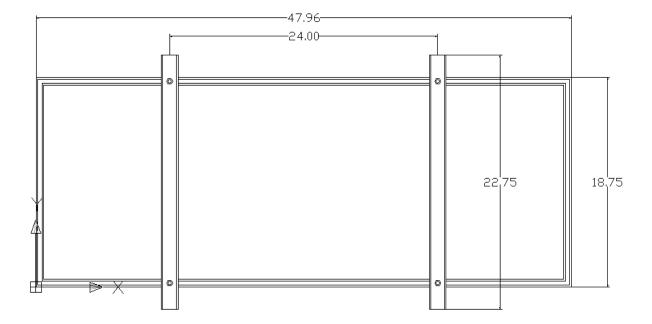

Specification Sheet Page | 2