# 15 inch Six-Digit Red LED

Count Up timer with RF wireless controls (outdoor)

DC-156T-UP-W





#### **Features**

- Counts up to 99 hours
- RF Wireless controls (150' range, WRC-2T)
- Additional timers can be used in the same area (Multiple channels)
- All aluminum enclosure
- 1 year Warranty

- Visible up to 750Ft
- Large 15.0 Inch Super Bright LED's
- Shift Digit Technology (displays 100th of a second)
- Made in the USA
- Factory Serviceable

#### **Options**

- Multi-Function Timer
- Additional channels available
- Nema 4X IP66, IK08 rated enclosure
- Higher power RF Wireless controls

- 120 VAC 9 foot power cord
- Hardwired remote controls
- Relay output end of period
- 100s of options call 800-977-6872

### **Specifications**

• Controls 2 Function Membrane Switch Pushbutton (Start-Stop and Reset to Zero),

2.4Ghz RF Wireless 1mW Handheld controller.

Display
Four digit bar; high intensity; seven segment; red LED display

Case
All aluminum, IP 66 outdoor, wet location, waterproof enclosure 72"Wx18"Hx3"D

Weight 50.0 Pounds

• Power Source 480 Watts; 90 – 240VAC 50/60 Hz @ 4 amps, outdoor rated junction box with

pigtails

Operating Temp 0° to 49° Celsius (32° to 120° Fahrenheit)

Case Finish Black Textured Powder Coating

## DC-156T-UP-W Description

The DC-Digital DC-156T-UP-W is designed to be used where a wireless controlled count up timer is needed. The DC-156T-UP-W utilizes the **shift digit technology** that allows the user to see hours as well as hundredths of a second. The flexibility of this unique design gives it a broad range of applications in schools, industry, governmental and churches. The RF (Radio Frequency) wireless controllability gives the user easy access and total freedom to all of its functions without sacrificing limited control, as found in our competitors IR (Infrared Led) remotes (IR remotes have limited range of transmission 50 feet or less and is limited to indoor operation only). It can be used in either existing buildings or new construction. Long viewing distances are accomplished with its large red LED display. The all aluminum, black extra tuff powder coated enclosure gives it a professional look that will hold up in many harsh environments. This unit includes one wireless remote control (WRC-2T). Additional wireless controllers are available for purchase.

937-746-9750, Fax 937-746-9704


325 Industry Drive, Carlisle, OH

Copyright IES, LTD. 2009

Specification Sheet Page | 1

## **DC-156T-UP-W** Mounting and Dimensions

There are (2) aluminum .125 inch x 1.5 inch x .75 inch C channel mounting rails that can be used as mounting brackets and secured to a wall or they can be removed and the (4)  $5/16 \times 1$  inch bolts can be used.

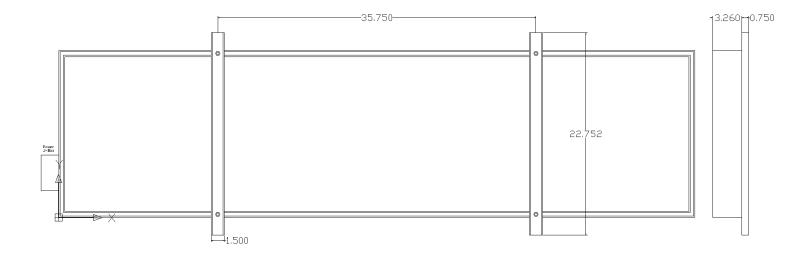

937-746-9750, Fax 937-746-9704 325 Industry Drive, Carlisle, OH

Copyright IES, LTD. 2009

Specification Sheet Page | 2