


2.3 inch Four-Digit LED

Count Up Timer with Nema 4X, IP66
Rated, Polycarbonate Enclosure

[DC-25T-UP-Nema](#)

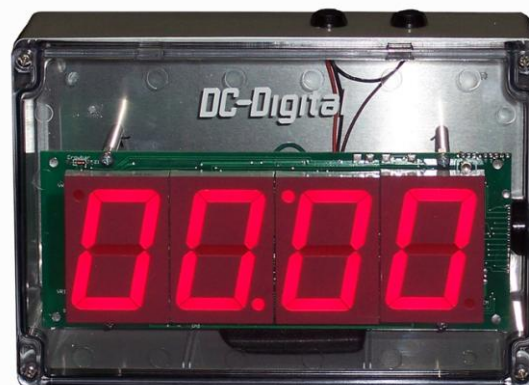

Features

- Counts up to 99 hours from hundredths of a second
- 2 Tactile momentary pushbuttons
- Nema 4X, IP66, Corrosion Resistant Poly Enclosure
- 1 year Warranty
- Visible up to 120 Ft.
- Large 2.3 Inch Super Bright LED's
- Made in the USA
- Shift Digit Technology
- Factory Serviceable

Options

- Terminal block connections
- Wired remote control
- RF wireless remote
- 1-Switch for Start-Stop-Reset
- Input redundancy, terminal blocks and switches
- Nema 4X IP66, IK08 rated enclosure
- 24VDC power input
- 100s of options call 800-977-6872

Specifications

- **Input** (1) Start-Stop (pause), (1) Reset to Zero, Momentary Pushbutton
- **Display** Four digit bar; high intensity; seven segment; red LED display
- **Case** Poly Carbonate, IP66, Nema 4X, 9.5"W x 6.3"H x 3.5"D
- **Weight** 5.0 Pounds
- **Power Source** 3 Watts; 90 – 240VAC 50/60 Hz, 9ft 3-prong SJ00W power cord
- **Operating Temp** 0° to 49° Celsius (32° to 120° Fahrenheit)
- **Case Finish** White Enclosure Clear see through Lid

[DC-25T-UP-Nema](#)

The DC-Digital [DC-25T-UP-Nema](#) is designed to be used where a highly visible, Waterproof Nema 4X enclosed count up timer is needed. The [DC-25T-UP-Nema](#) utilizes the **shift digit technology** that allows the user to see hours as well as hundredths of a second. The flexibility of this unique design gives it a broad range of applications in industry, government, schools and churches. It can be used in either existing buildings or new construction. Long viewing distances are accomplished with its large red LED display. The all Poly carbonate corrosion resistant enclosure gives it a professional look that will hold up in many harsh environments.

DC-25T-UP-Nema Mounting and Dimensions

There are (4) .18 inch diameter mounting holes located at each corner underneath the clear lid. To access the mounting holes first remove the lid.

