6.0 inch Six-Digit

Count up Timer with RF Wireless controls

(outdoor) DC-606T-UP-W-IN





Features

- Counts up to 99 Hours from hundredths of a second
- All Extruded aluminum enclosure
- Excellent viewing in bright sunlight
- 1-Year warranty
- RF Wireless controls (150' range, WRC-2T)

- Visible up to 300 feet
- Large 6.0 Inch Super Bright LED's
- Factory calibrated quartz accuracy
- Made in the USA
- Junction box for connections

Options

- Terminal block connections
- Wired remote control
- RF wireless remote

- Input redundancy, terminal blocks and switches
- Nema 4X IP66, IK08 rated enclosure
- 24VDC power input

Specifications

Input
2 Function Membrane Switch Pushbutton (Start-Stop and Reset to Zero),

2.4Ghz RF Wireless 1mW Handheld controller

Display
6.0 Inch, Six digit, Seven Segment, High Intensity, Red LED display

Case Extruded Aluminum; 23-1/8"w x 7-1/2"H x 3-1/8"D

Weight 25.0 Pounds

• Power Source 28 Watts; 90 – 240VAC 50/60 Hz @ 4 amps, outdoor rated junction box with

pigtails

Operating Temp 0° to 49° Celsius (32° to 120° Fahrenheit)

Case Finish Tough, Finger Print Resistant, Black Powder Coating

DC-606T-UP-W-IN Description


The DC-Digital DC-606T-UP-W-IN is designed to be used where a wireless controlled count up timer is needed. The DC-606T-UP-W-IN utilizes the **shift digit technology** that allows the user to see hours as well as hundredths of a second. The flexibility of this unique design gives it a broad range of applications in schools, industry, governmental and churches. The RF (Radio Frequency) wireless controllability gives the user easy access and total freedom to all of its functions without sacrificing limited control, as found in our competitors IR (Infrared Led) remotes (IR remotes have limited range of transmission 50 feet or less and is limited to indoor operation only). It can be used in either existing buildings or new construction. Long viewing distances are accomplished with its large red LED display. The all aluminum, black extra tuff powder coated enclosure gives it a professional look that will hold up in many harsh environments. This unit includes one wireless remote control (WRC-2T). Additional wireless controllers are available for purchase

937-746-9750, Fax 937-746-9704 325 Industry Drive, Carlisle, OH

Copyright IES, LTD. 2009

Specification Sheet Page | 1

DC-606T-UP-W-IN Mounting and Dimensions

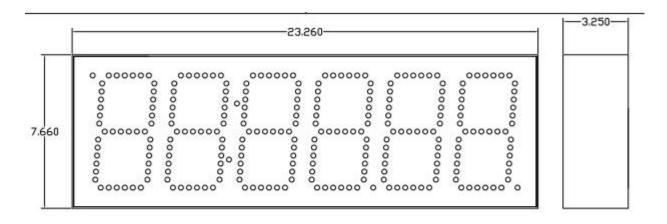



Specification Sheet Page | 2