


# 6.0 inch Six-Digit LED

RF wireless controlled Universal Countdown and Count Up Timer and Time of Day Clock

**DC-606UTW**

**DC-Digital**  
tm

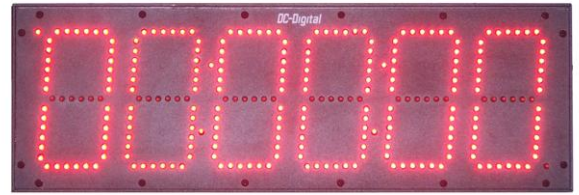

## Features

- Extruded aluminum enclosure
- Counts up or down to 99 hours
- Displays up to 100ths of a sec
- 1 year Warranty
- Time of day display
- RF Wireless controls (150' range [WRC-8T](#))
- Visible up to 300Ft
- Large 6.0 Inch Super Bright LED's
- Made in the USA
- Shift Digit Technology
- Factory Serviceable

## Options

- High output end of period buzzer
- Wireless remote control
- Nema 4X IP66, IK08 rated enclosure
- Higher power RF Wireless controls
- 120 VAC 9 foot power cord
- Tripod mount
- Relay output end of period
- 100s of options call 800-977-6872

## Specifications

- **Controls** 8 Function Membrane Switch Pushbutton, 2.4 Ghz RF wireless 1mW, Start-Stop, Reset to the last value, Reset to Zero, Set Hours, Set Minutes, Set Seconds, Time of day clock/Timer, Count Up/Countdown
- **Display** Six digit bar; high intensity; seven segment; red LED display
- **Case** Extruded aluminum enclosure, 23-1/8"W x 7-1/2"L x 3-1/8"D
- **Weight** 8.0 Pounds
- **Power Source** 4 Watts; 90 – 240VAC 50/60 Hz, 6ft 3-prong power cord
- **Operating Temp** 0° to 49° Celsius (32° to 120° Fahrenheit)
- **Case Finish** Black Textured Powder Coating

## DC-606UTW

The DC-Digital [DC-606UTW](#) is designed to be used where a universal count up, countdown, timer and time of day clock is needed. The [DC-606UTW](#) utilizes the **shift digit technology** that allows the user to see hours as well as hundredths of a second. The flexibility of this unique design gives it a broad range of applications in schools, industry, governmental and churches. The top mounted controls gives the user flexible and instant control at any time . It can be used in either existing buildings or new construction. Long viewing distances are accomplished with its large red LED display. The all aluminum, black extra tuff powder coated enclosure gives it a professional look that will hold up in many harsh environments.

## [DC-606UTW](#) Mounting and Dimensions

There are (2) teardrop mountings for easy attachment to a couple of screws secured to a wall. Also supplied are 4 adhesive backed rubber feet that can be adhered to the enclosure bottom for table or Mount on a desk top.

