6.0 inch Four-Digit LED

Count up timer with RF wireless controls

DC-60T-UP-W-IN



Features

- Counts up to 99 hours
- RF Wireless controls (150' range, WRC-2T)
- Additional timers can be used in the same area (Multiple channels)
- All aluminum enclosure
- 1 year Warranty

Options

- RF Wireless Controls
- BCD Rotary Set Switches
- Input redundancy, terminal block and switches
- Minutes and Seconds



- Visible up to 300Ft
- Large 6.0 Inch Super Bright LED's
- Shift Digit Technology (displays 100th of a second)
- Made in the USA
- Factory Serviceable
- Nema 4X IP66, IK08 rated enclosure
- 24Vdc power
- Hours and minutes timing interval
- 100s of options call 800-977-6872

Specifications

•	Controls	(2 Function Membrane Switch Pushbutton (Start-Stop and Reset to Zero), 2.4Ghz RF Wireless 1mW Handheld controller.
•	Display	Four digit bar; high intensity; seven segment; red LED display
•	Case	Extruded aluminum enclosure, 23-1/8"W x 7-1/2"L x 3-1/8"D
•	Weight	8.0 Pounds
٠	Power Source	4 Watts; 90 – 240VAC 50/60 Hz, 6ft 3-prong power cord
•	Operating Temp	0° to 49° Celsius (32° to 120° Fahrenheit)
٠	Case Finish	Black Textured Powder Coating

DC-60T-UP-W-IN


The DC-Digital <u>DC-60T-UP-W-IN</u> is designed to be used where a wireless controlled count up timer is needed. The <u>DC-60T-UP-W_IN</u> utilizes the **shift digit technology** that allows the user to see hours as well as hundredths of a second. The flexibility of this unique design gives it a broad range of applications in schools, industry, governmental and churches. The RF (**R**adio **F**requency) wireless controllability gives the user easy access and total freedom to all of its functions without sacrificing limited control, as found in our competitors IR (Infrared Led) remotes (IR remotes have limited range of transmission 50 feet or less and is limited to indoor operation only). It can be used in either existing buildings or new construction. Long viewing distances are accomplished with its large red LED display. The all aluminum, black extra tuff powder coated enclosure gives it a professional look that will hold up in many harsh environments. This unit includes one wireless remote control (WRC-2T). Additional wireless controllers are available for purchase.

937-746-9750, Fax 937-746-9704 325 Industry Drive, Carlisle, OH

Copyright IES, LTD. 2009

. DC-60T-UP-W-IN Mounting and Dimensions

There are (2) teardrop mountings for easy attachment to a couple of screws secured to a wall. Also supplied are 4 adhesive backed rubber feet that can be adhered to the enclosure bottom for table or Mount on a desk top.

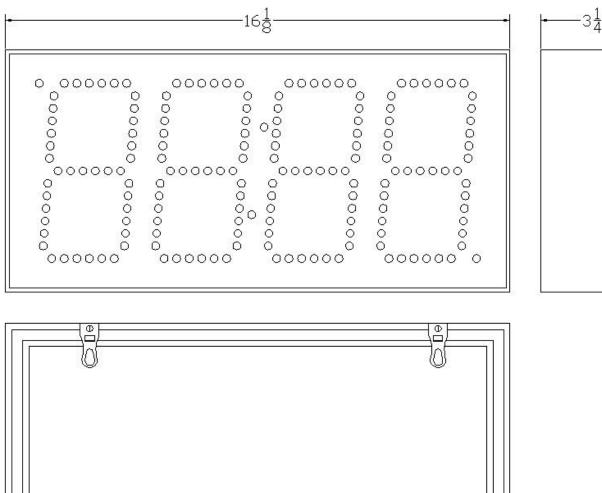

7