13 Character 2-Word Static LED Message Board

DC-1.25-13-STATIC





Features

- 13-Characters, 100,000 hour operation
- 8 x 80 RED- High Visible-Dot matrix LED's
- Surface mount
- All aluminum excluded enclosure
- Made in the USA

- Easy toggle switch between words
- 1.25 Inch Characters
- Visible up to 75Ft.
- Factory serviceable modular design
- 2-Word Design

Options

- Orange, Green LEDs
- Nema 4X Enclosure
- Cantilever Mounting for Bi-Directional Viewing
- Computer Controlled
- infinite words up to 13 characters

- Portable
- Wired or Wireless Remote
- Tripod Mount
- Scrolling
- Rotation

Specifications

• Input Toggle Switch, mounted on the side of enclosure (CLASSIFIED or

UNCLASSIFIED)

Display
1.25 Inch, 8 x 80, 13 Character, RED, LED Dot Matrix with RED Acrylic lens

Case Extruded Aluminum; 16"L X 5"W X 2.25"D

• Weight 1.0 Pounds

Power Source
20 Watts; 90 – 240VAC 50/60 Hz, 3 Prong, 6 Ft Power cord

Operating Temp 0° to 49° Celsius (32° to 120° Fahrenheit)

Case Finish Tough, Finger Print Resistant, Black, Textured, Powder Coat

Cabling None

DC-1.25-13-STATIC Description


The DC-Digital DC-1.25-13-STATIC, is designed to be used in a application where a 13 character LED static message board is needed to be seen. It contains 2 customer designated words that is easily switched. Surface mount all aluminum extruded enclosure. Bright high visible LED dot matrix display. This equipment is proudly made in the USA. This display is factory serviceable.

Specification Sheet

Page | 1

DC-1.25-13-STATIC Mounting and Dimensions

(2) teardrop mounting tabs that can be adjusted horizontally.

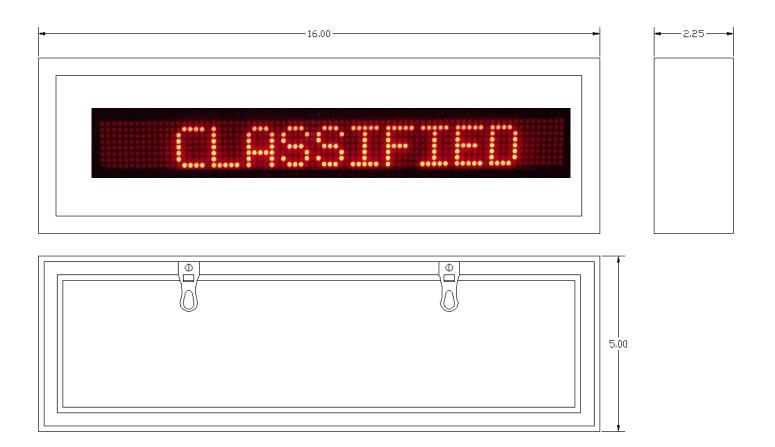

Specification Sheet Page | 2