

6.0 inch Four-Digit LED

Universal Countdown and Count
Up Timer and Time of Day Clock

[DC-60UT](#)

DC-Digital
tm



Features

- Extruded aluminum enclosure
- Counts up or down to 99 hours
- Displays up to 100ths of a sec
- 1 year Warranty
- Time of day display
- Side mounted set switches
- Visible up to 300Ft
- Large 6.0 Inch Super Bright LED's
- Made in the USA
- Shift Digit Technology
- Factory Serviceable

Options

- Wired or wireless remote control
- Nema 4X IP66, IK08 rated enclosure
- 120 VAC 9 foot power cord
- 100s of options call 937-746-9750
- Tripod mount
- Relay output end of period
- High output end of period buzzer

Specifications



- **Controls** 12mm sealed side mounted push button switches:
 - Start/Stop
 - Clock / Timer
 - Up / Down (referring to the timer)
 - Set Hours
 - Set Minutes
 - Reset to Last Value
 - Reset to Zero
- **Display** Four digit bar; high intensity; seven segment; red LED display
- **Case** Extruded aluminum enclosure, 16-1/8"W x 7-1/2"L x 3-1/8"D
- **Environment** Outdoor rated
- **Weight** 8.0 Pounds
- **Power Source** 4 Watts; 90 – 240VAC 50/60 Hz (via side mounted 1G junction Box)
 - Wire connections for 120VAC Live, Neutral, and Ground
- **Operating Temp** 0° to 49° Celsius (32° to 120° Fahrenheit)
- **Case Finish** Textured black powder coating

DC-60UT

The DC-Digital [DC-60UT](#) is designed to be used where a universal count up, countdown, timer and time of day clock is needed. The [DC-60UT](#) utilizes the **shift digit technology** that allows the user to see hours as well as hundredths of a second. The flexibility of this unique design gives it a broad range of applications in schools, industry, governmental and churches. The side mounted controls gives the user flexible and instant control at any time. It can be used in either existing buildings or new construction. Long viewing distances are accomplished with its large red LED display. The all aluminum, black extra tough powder coated enclosure gives it a professional look that will hold up in many harsh environments.

Mounting and Dimensions

There are (2) teardrop mountings for easy attachment to a couple of screws secured to a wall. These mounting tabs are repositionable long the channel of the aluminum extrusion.

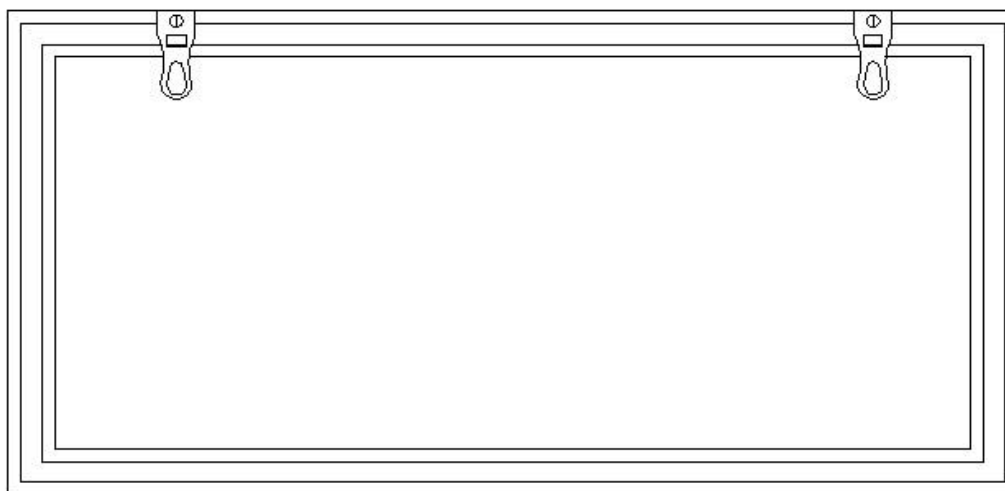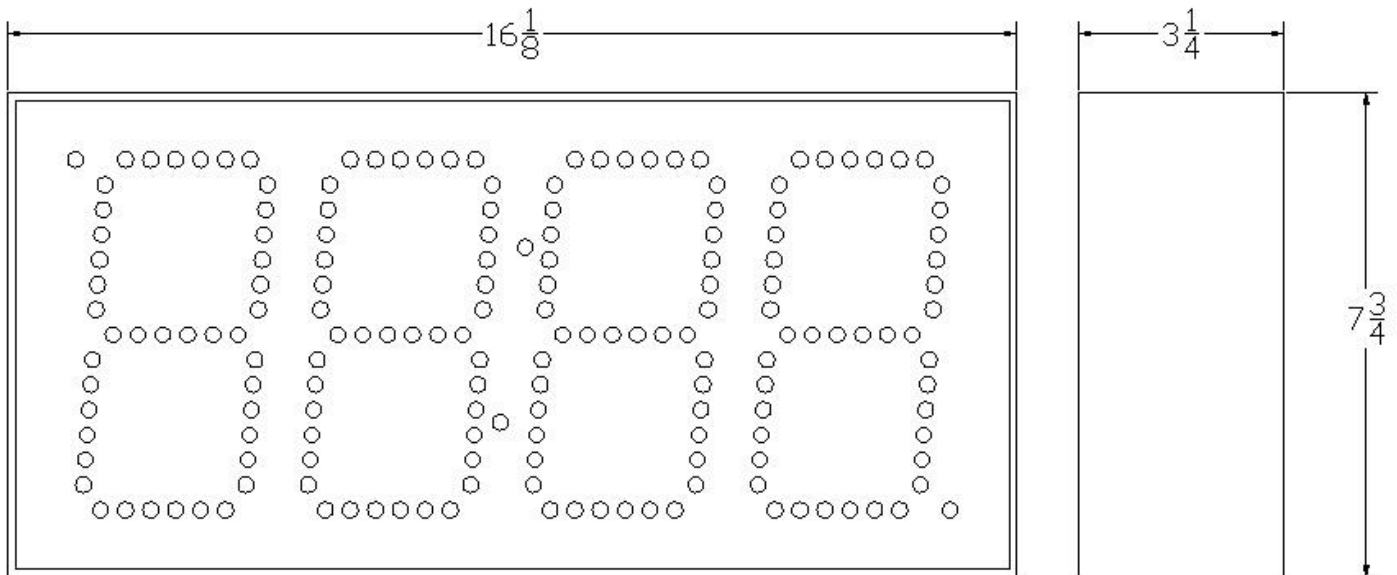

* Dimensions are $\pm .125$