Rough-in Back Box for DC-25 Flush Mount Displays DC-25-BB





Features

- Used for flush mounting 2.3 inch 4 digit displays
- 1/2 Inch knockouts (1 each side)
- Fits between standard 16 inch on center stud walls
- Made in the USA

- 14 Gauge Aluminum
- 8-32 machine screw threads
- Case 14 Gauge aluminum; 12" Wide x 4.75" High x 2.75" Deep (fits DC-25 flush front)
- Access (5) 1/2-inch knockouts (7/8-inch diameter)
- Weight .5 PoundsCase Finish Brushed


DC-25-BB Description

The DC-Digital DC-25-BB rough in back box is designed to be used in any application where a flush mounted 2.3 inch 4 digit display is to be required. The DC-25-BB will mount directly into a 16 inch on center stud wall and or any other substrate that can support the shown dimensions. Its cavity has ample room for making up multiple cabling connections. This unique design can be used in either existing buildings or new construction. This equipment is proudly made in the USA.

Specification Sheet Page | 1

DC-25-BB mounting and Dimensions

Mounts into standard wall opening between 16 inches on center studs or other. There are (4) 8-32 threaded machine screw holes for attaching the flush mount front (sold separately).

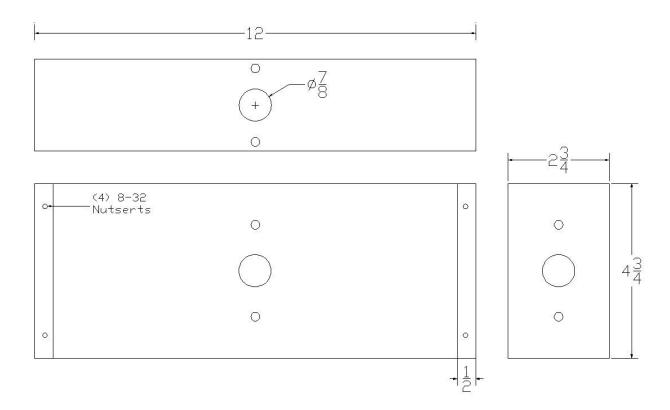

Specification Sheet Page | 2