

4.0 inch Four-Digit Clock, 2.5  
Inch Seven-Digit Date,  
Network NTP, POE, Surface  
Mount, Aluminum

[DC-25ALN-Date-40-Time-POE](#)

**DC-Digital**  
tm



## Features

- Web browser based interface & monitoring
- User selectable DHCP or Static IP (default DHCP)
- User selectable time zone & time format
- Acquires atomic NTP time & date from any server
- Time & date also shown on web page interface
- NEMA 4, 4X, 12, 13, IP66 Ratings, 14Ga. Aluminum
- .250" Closed cell foam XLPE gasket (standard)
- 2.5 Inch alpha-numeric date, 4.0 inch time LED's
- Time is visible up to 200 Ft, Date 120 Ft..
- Sealed cable gland for Ethernet connection
- Factory serviceable modular design
- Made in the USA

## Options

- PE, Food Grade PE, EPDM, PTFE gaskets
- 2.5 inch LED time of day clock
- Flush mount
- 316L Stainless flush or surface mount enclosure
- Network, Non-POE (local power)
- POE injector
- Wireless data system
- Webserver-1 for viewing up to 50


## Specifications

- **Input** POE (Power Over Ethernet), Data DHCP or Static IP NTP selectable
- **Display** 4.0 Inch four digit LED clock, 2.5 Inch digit red LED alpha-numeric display date
- **Case** Aluminum 14 Ga. , 17" W x 11" H x 3.25" D, .25" XLPE closed cell gasket
- **Weight** 15.0 Pounds
- **Power Source** POE (user supplied) 500 mA, 6 Watts, 12Vdc after splitter
- **Operating Temp** 0° to 49° Celsius (32° to 120° Fahrenheit)
- **Case Finish** Black textured powder coated
- **Cabling** Ethernet

## [DC-25ALN-Date-40-Time-POE](#) Description

The DC-Digital [DC-25ALN-Date-40-Time-POE](#) Atomic, network, date & time of day clock is designed to be used in any application where a 2.5 Inch 7 digit date and a larger 4.0 inch LED time of day clock with IP66 rated, gasketed, 14 gauge aluminum surface mount enclosure (intended for regular disinfection and cleaning) is needed to be seen. It automatically queries NTP once every 10 seconds (user selectable) and on power up. It can be set up for 12- or 24-hour time format (default is 12 Hour). It can be set up for static IP (default DHCP) to receive the NTP from your server (default is NIST). This unique design can be used in either existing buildings or new construction. The [DC-25ALN-Date-40-Time-POE](#) date & time of day clock comes with all stainless surface mount enclosure with a gasket and polycarbonate lens, and 3 mounting points. This equipment is proudly made in the USA. This display is factory serviceable.

DC-Digital [DC-25ALN-Date-40-Time-POE](#) wall mounting and dimensions

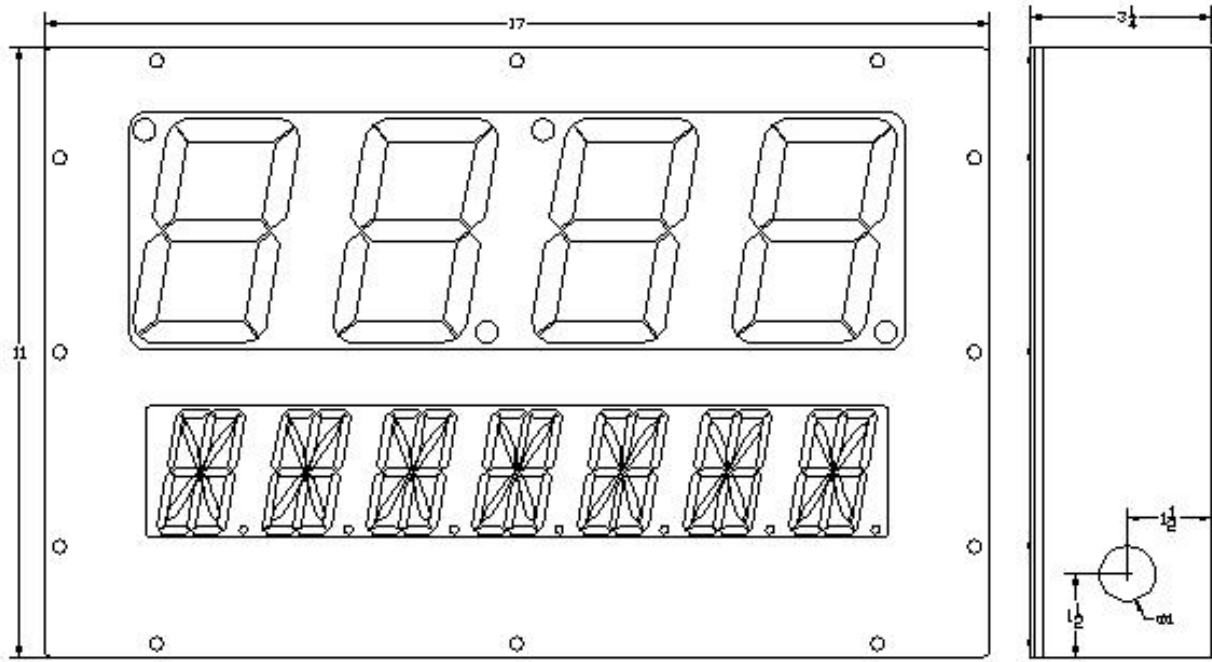

Right side view  
(Shown with front plate  
and gasket installed)

