


## 2.3 Inch Four-Digit LED

Count Up Timer with Internal  
terminal blocks for controls

### [DC-25T-UP-Term-Bay-Timer](#)

**DC-Digital**  
tm

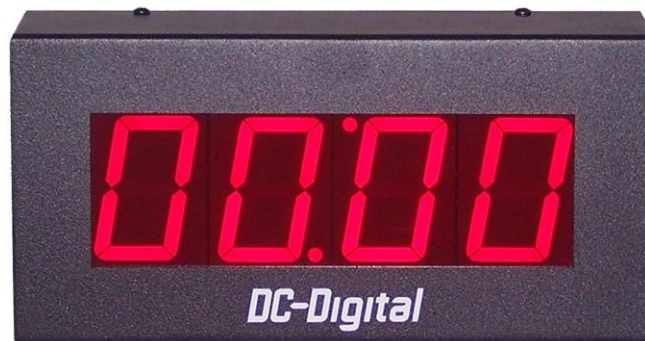

### Features

- Counts up to 99 hours from seconds
- Heavy duty all aluminum .063-inch-thick enclosure
- Factory calibrated
- Optically isolated inputs
- Terminal block connections for cabling
- Visible up to 120Ft
- Large 2.3 Inch super bright bar LED's
- .125 Inch acrylic red lens
- Hand made in the USA
- Factory serviceable LED's and electronics

### Options

- Networkable
- Wired and wireless remote controls
- Master output for secondary displays
- 1-Switch for Start-Stop-Reset
- NEMA 4X IP66, IK08 rated enclosure
- 24Vdc power
- 120 VAC 9 foot power cord
- 100s of options call 800-977-6872

### Specifications

- **Input** (1) Reset to zero and start, 10ms response time momentary contact closure or PNP (5-30VDC)
- **Display** Four-digit bar; high intensity; seven segment; red LED display
- **Case** All aluminum enclosure, 9.625"W x 4.625"H x 3"D
- **Weight** 3.0 Pounds
- **Power Source** 3 Watts; 90 – 240VAC 50/60 Hz (12VDC @ 700 ma power supply, [PS-12-700](#))
- **Operating Temp** 0° to 49° Celsius (32° to 120° Fahrenheit)
- **Case Finish** Finger Print Resistant, Tough, Black Textured Powder Coating

### [DC-25T-UP-Term-Bay-Timer](#)

The [DC-Digital DC-25T-UP-Term-Bay-Timer](#) is designed to be used where a highly visible count up service bay timer is needed. [The DC-25T-UP-Term-Bay-Timer](#) utilizes shift **digit technology** that allows the user to see hours as well as minutes and seconds. The flexibility of this unique design gives it a broad range of applications in the vehicle service bay arena. The Internal terminal blocks allow for opto-coupled hardwired controls from PLC's, switches, relays and or sensors. It can be used in either existing buildings or new construction. Long viewing distances are accomplished with its large red LED display. The all aluminum, black extra tough powder coated enclosure gives it a professional look that will hold up in many harsh environments.

## DC-25T-UP-Term-Bay-Timer mounting and dimensions

There are (6) keyhole mounting knockouts for easy attachment to an electrical handy-box or an electrical 4 square box or simply several screws secured to the wall. Also supplied are 4 adhesive backed rubber feet that can be adhered to the enclosure bottom for table or desk top mounting.

