


## 4.0 Inch Four-Digit LED Countdown Timer with Rotary Set Switches; For Remote PNP, Contact Closure Input Controls (NPN Optional)

### **DC-40T-DN-BCD**

**DC-Digital**  
tm

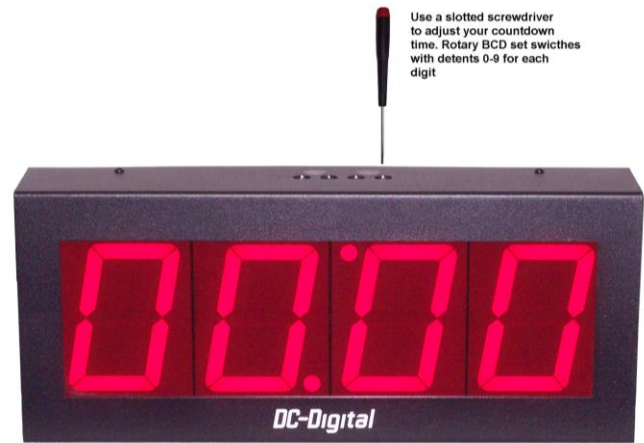

## Features

- Easy set rotary switches (1 per digit) MM: SS (Standard)
- [Set and Forget Technology](#) (no batteries required)
- Accepts contact closure or PNP input (5-30 VDC)
- 3 Separate screw terminal inputs: Start, Stop (pause), Reset to Set Value and Start (many other combinations available)
- 2x4 or 4x4 rough-in box, wall or desk mountable
- All aluminum 14 Ga. enclosure
- Enclosure easily separates (4) 6-32 machine screws
- Large 4.0-inch super bright LED's
- Viewable up to 200 ft. away
- 120 Vac wall adapter included
- Factory serviceable
- Made in the USA

## Options

- Momentary push button switches
- Wired and wireless remote controls
- Redundant controls, wired and local switches
- 1-Switch for Start-Stop-Reset
- NEMA 4X IP66, IK08 rated poly-carbonate enclosure
- 120 Vac power cord, or POE (power over ethernet)
- HH:MM, SS:TH time formats
- Customizable! [Contact us](#)

## Specifications

- **Input** (1) Start (2) Stop (pause) (3) Reset to the set value, momentary contact closure or PNP pulse (10ms response)
- **Display** Four-digit red LED diffused seven segment bar; high intensity; replaceable digits
- **Case** All aluminum enclosure 14 Ga., 16.25" W x 6.75"H x 3"D
- **Weight** 2.0 lbs.
- **Power Source** 2 Watts; 90 – 240VAC 50/60 Hz (12VDC @ 700 ma power supply, [PS-12-700](#))
- **Operating Temp** 0° to 49° Celsius (32° to 120° Fahrenheit)
- **Case Finish** Fingerprint resistant, black textured powder coating

### [DC-40T-DN-BCD](#)

The DC-Digital [DC-40T-DN-BCD](#) is designed to be used where a highly visible LED minutes and seconds remote controlled countdown timer is needed. The [DC-40T-DN-BCD](#) is set by 4 independent rotary set switches (1 per digit) mounted on the top surface of the enclosure but below the plane and allows the timer to retain the set value indefinitely (no memory batteries required). The flexibility of this unique design gives it a broad range of applications in industry, government, schools, entertainment, sports, and churches. The Internal terminal blocks allow for hardwired controls from PLC's , switches, relays, and sensors. It can be used in either existing buildings or new construction. Long viewing distances are accomplished with its large red LED display. The all-aluminum, tough black powder coated enclosure gives it a professional look that will hold up in many harsh environments. This product and all DC-Digital products are proudly made in the USA.

## DC-40T-DN-BCD Mounting and Dimensions

There are (8) keyhole mounting knockouts for attachment to a 2x4 or 4x4 electrical rough-in box or to screws secured to a wall.

