


2.3 Inch Four-Digit Network NTP, POE,  
Time of Day Clock and 2.3 Inch Seven-  
Digit Alphanumeric Date with Flush  
Mount 316L Stainless Gasketed Enclosure

[DC-25ALN-Date-Time-POE-Stainless-Flush](#)

**DC-Digital**  
tm

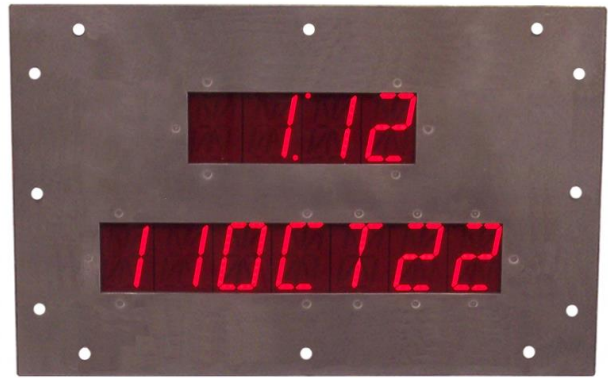

## Features

- Web page browser-based interface & monitoring
- User selectable DHCP or Static IP (default DHCP)
- User selectable time zone & time format
- Acquires atomic NTP time & date from any server
- Time & date also shown on web page interface
- NEMA 4, 4X, 12, 13, IP-66, 316L, Stainless
- .125" Closed cell foam XLPE gasket (standard)
- Large 2.3 Inch super bright alpha-numeric LED's
- Visible up to 120 Ft.
- Sealed cable gland for Ethernet connection
- Factory serviceable modular design
- Made in the USA

## Options

- Can be grouped; [DC-Webserver-Clocks-1](#)
- PE, Food Grade PE, EPDM, PTFE gaskets
- 4-inch LED time of day clock
- Surface mount 316L stainless
- Aluminum flush or surface mount enclosure
- Network, non-POE (local power)
- POE injector
- Wireless synchronized data system

## Specifications

- **Input** POE (Power Over Ethernet), Data DHCP or Static IP NTP selectable
- **Display** 2.5 Inch, four digits clock, seven digits date, red LED alpha-numeric display
- **Case** Stainless SAE 316L, 18.75" W x 12.75" H x 1.56" D, with .125" XLPE closed cell
- **Weight** 15.0 Pounds
- **Power Source** POE, 802.3AF Compliant, 350 mA, 4.2 Watts
- **Operating Temp** 0° to 49° Celsius (32° to 120° Fahrenheit)
- **Case Finish** Brushed 316L Stainless 2B finish
- **Cabling** Cables gland rt. side, RJ-45 Cat 5-6 connection into splitter (CE, Fcc compliant)

## [DC-25ALN-Date-Time-POE-Stainless-Flush](#) Description

The DC-Digital [DC-25ALN-Date-Time-POE-Stainless-Flush](#) Atomic, network, date & time of day clock is designed to be used in any application where a 11 digit date & time of day clock with IP-66 rated, gasketed, 316L surface mount enclosure (intended for regular disinfection and cleaning) is needed to be seen. It automatically queries NTP once every 1 minute (user selectable) and on power up. It can be set up for 12- or 24-hour time format (default is 12 Hour). It can be set up for static IP (default DHCP) to receive the NTP from your server (default is NIST). This unique design can be used in either existing buildings or new construction. The [DC-25ALN-Date-Time-POE-Stainless-Flush](#) date & time of day clock comes with all stainless surface mount enclosure with a gasket and polycarbonate lens, and 3 mounting points. This equipment is proudly made in the USA. This display is factory serviceable.

# DC-Digital [DC-25ALN-Date-Time-POE-Stainless-Flush](#) wall mounting and dimensions

There are (12) .240 diameter anchoring points.

Note: On thinner walls it is recommended using #10 screws:

For sheet metal screws use Fastenal # 0148063 or Timmerman # C8120-10-4 spring nuts

For machine screws use Fastenal # 0148061 or Timerman # C8115-1024-4 spring nuts

