

- Counts up to 99 hours from hundredths of a second
- Heavy duty all aluminum enclosure
- Displays up to 100ths of a sec
- 1 year Warranty
- Remote controlled with 25Ft. of cabling and locking connector, plug in the timer and use.

Options

- RF-Wireless Remote Control
- Sealed Pushbuttons mounted on the enclosure
- Input redundancy, terminal block and switches
- 1-Switch for Start-Stop-Reset


- Visible up to 120Ft
- Large 2.3 Inch Super Bright LED's
- Made in the USA
- Shift Digit Technology
- Factory Serviceable
- NEMA 4X IP66, IK08 rated enclosure
- 24Vdc power
- 120 VAC 9 foot power cord
- 100s of options call 800-977-6872

Specifications

•	Input	(1) Start-Stop (pause), (1) Reset to Zero (sealed momentary pushbuttons switches mounted in a plastic enclosure with 25 ft. cabling and connector)
•	Display	Four digit bar; high intensity; seven segment; red LED display
•	Case	All aluminum enclosure, 9.625"W x 4.625"H x 3"D
•	Weight	5.0 Pounds
•	Power Source	3 Watts; 90 – 240VAC 50/60 Hz (12VDC @ 700 ma power supply, PS-12-700)
•	Operating Temp	0° to 49° Celsius (32° to 120° Fahrenheit)
•	Case Finish	Finger Print Resistant, Tough, Black Textured Powder Coating

DC-25T-UP-Plug-N-Play Description

The DC-Digital <u>DC-25T-UP-Plug-N-Play</u> is designed to be used where a highly visible count up timer is needed. The <u>DC-25T-UP-Play-N-Play</u> utilizes the **shift digit technology** that allows the user to see hours as well as hundredths of a second. The flexibility of this unique design gives it a broad range of applications in industry, government, schools and churches. The Plug-N-Play hardwired remote control switches make it ideal for those customers who just want to plug the timer in and use without any mounting or running of cabling. It can be used in either existing buildings or new construction. Long viewing distances are accomplished with its large red LED display. The all aluminum, black extra tough powder coated enclosure gives it a professional look that will hold up in many harsh environments. There are (6) keyhole mounting knockouts for easy attachment to an electrical handy-box or an electrical 4 square box or simply several screws secured to the wall. Also supplied are 4 adhesive backed rubber feet that can be adhered to the enclosure bottom for table or desk top mounting.

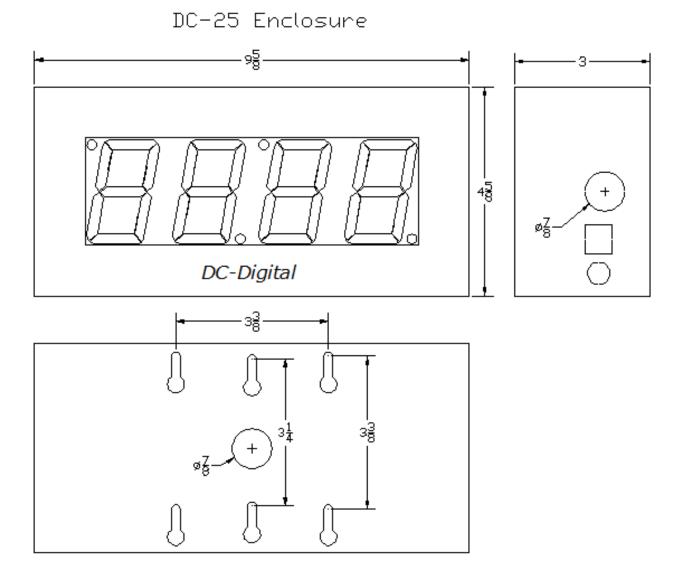

325 Industry Drive, Carlisle, OH

Copyright IES, LTD. 2009

937-746-9750, Fax 937-746-9704