

4.0 Inch Four-Digit
Network NTP, POE, Time of Day
Clock, Flush Mount, Aluminum
[DC-40N-POE-Flush-Aluminum](#)

DC-Digital
tm



Features

- Web browser based interface
- User selectable DHCP or Static IP (default DHCP)
- User selectable time zone & time format
- Acquires atomic NTP time from any server
- Automatically displays IP-Address upon power up
- NEMA 4, 4X, 12, 13, IP-66, 14 ga. aluminum enclosure
- .125" Closed cell foam XLPE gasket (standard)
- Large 4.0 Inch super bright bar LED's
- Visible up to 200Ft.
- 1.56 Inch deep (fits narrow thickness wall designs)
- Factory serviceable modular design
- Made in the USA

Options

- PE, Food Grade PE, EPDM, PTFE gaskets
- Rough-in backbox
- NEMA 4X Polycarbonate case
- 316L Stainless flush or surface mount enclosure
- Network, Non-POE (local power)
- POE injector
- Surface mount stainless
- 8-Hole design for thinner walls


Specifications

- **Input** POE (Power Over Ethernet), data DHCP or static IP NTP selectable
- **Display** 4.0 Inch, four digits, seven segment, red LED display
- **Case** 14 ga. aluminum, 18" W x 9" H x 1.56" D, .125" XLPE closed cell gasket
- **Weight** 4.0 Pounds
- **Power Source** POE (802.3AF Compliant) 350 mA, 4.2 Watts
- **Operating Temp** 0° to 49° Celsius (32° to 120° Fahrenheit)
- **Case Finish** Black textured powder coating
- **Cabling** Ethernet

[DC-40N-POE-Flush-Aluminum](#) Description

The DC-Digital [DC-40N-POE-Flush-Aluminum](#) Atomic, network, time of day clock is designed to be used in any application where a 4 digit time of day clock with IP-66 rated, gasketed, 14 ga. flush mount aluminum enclosure (intended for regular disinfection and cleaning) is needed to be seen. It automatically queries NTP once every 10 seconds (user selectable) and on power up. It can be set up for 12 or 24 hour time format (default is 12 Hour). It can be set up for static IP (default DHCP) to receive the NTP from your server (default is NIST). This unique design can be used in either existing buildings or new construction. The [DC-40N-POE-Flush-Aluminum](#) time of day clock comes with all aluminum flush mount gasketed enclosure and acrylic lens, and 4 mounting points. This equipment is proudly made in the USA. This display is factory serviceable.

DC-Digital [DC-40N-POE-Flush-Aluminum](#) mounting and dimensions

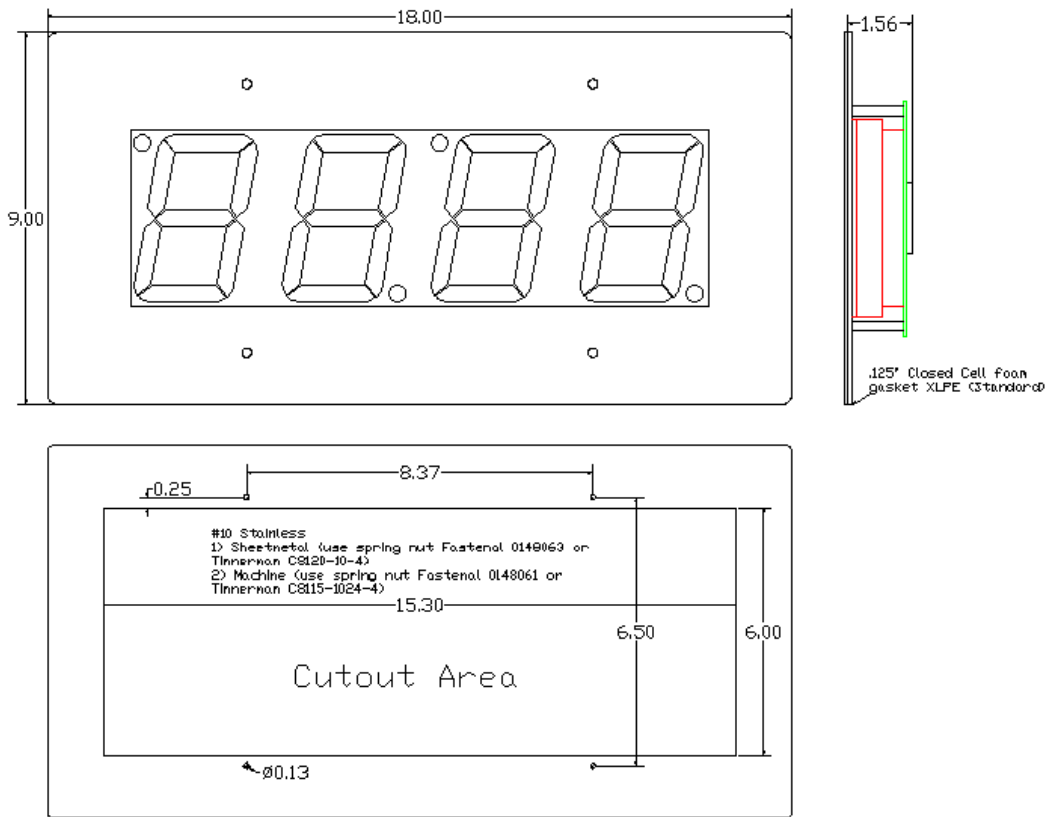

Optional Backbox (fits 16 on center stud walls)

